



TERM2000 Minimum distances: 'A' Floors 'B' Ceilings 'C' Side walls

TERM2000 Models		Minimum distances		
		A [m]	B [m]	C [m]
1,0 kW - 1,65 kW		2,1	0,15	1,0
1,7 kW - 2,0 kW		2,1	0,20	1,0
3,0 kW - 4,0 kW		3,0	0,30	1,0
4,1 kW - 5,9 kW		3,5	0,30	1,0
6,0 kW - 7,9 kW		4,5	0,30	1,0
8,0 kW - 11,9 kW		5,0	1,00	1,5
12,0 kW - 18,0 kW		6,0	1,00	2,0



TERM 2000 Heating surfaces at 45° mounting angle

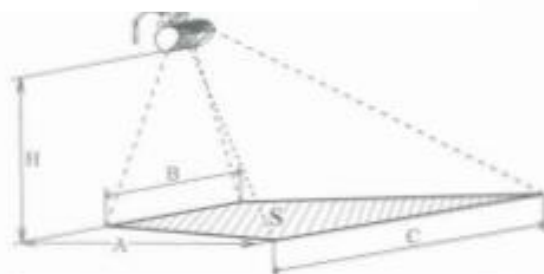

TERM2000 Models		Höhe H [m]	Heating dimensions			
			A [m]	B [m]	C [m]	S [m ²]
	RCA 165 (1,65kW)	1,8	2,7	2,6	4,9	10,1
	RCA 020 (2 kW)	2,1	3,2	3,0	5,8	14,1
	RCB 040 (4 kW)	3,0	4,6	3,6	7,2	24,8
	RCJ 040 (4 kW)	3,0	4,1	4,3	8,4	25,4
	RCC 060 (6 kW)	4,5	5,1	4,0	8,6	32,1
	RCK 060 (6 kW)	4,5	4,4	5,4	9,8	32,6
	RCD 080 (8 kW)	5,0	5,0	4,8	9,6	36,0
	RCM 080 (8 kW)	5,0	5,8	4,2	8,9	36,7
	RCN 100 (10 kW)	5,0	7,1	4,2	9,8	49,7
	RCE 120 (12 kW)	6,0	8,0	4,6	10,8	61,6
	RCL 120 (12 kW)	6,0	5,8	6,6	13,2	57,4
	RCP 120 (12 kW)	6,0	9,5	4,3	10,1	68,4
	RCF 180 (18 kW)	6,0	8,3	6,6	13,4	83,0
	RCS 180 (18 kW)	6,0	12,0	4,4	10,2	87,6